

SF frames, primed, mild steel

SF-kehukset, pohjamaalattu teräs » Рама SF, окрашенная, стальная » SF-ramar, lackerat konstruktionsstål »
Telaio SF, in acciaio con prima mano d'antiruggine



RATINGS	Fire: A-Class, H-Class, UL1479	Water pressure: 4 bar	Gas pressure: 2.5 bar
----------------	---------------------------------------	------------------------------	------------------------------

	FI Kehys	Aukkojen lukumäärä	Pakkaustila (mm)	Ulkomitat (D=60 mm)		Paino	
				HxW (mm)	HxW (in)	(kg)	(lb)
	RU Рама	Количество проёмов	Зона уплотнения (мм)	Внешние размеры (D=60 мм)		Вес	
	SE Ram	Ramöppningar	Packningsutrymme (mm)	Yttermått (D=60 mm)		Vikt	
	IT Telaio	Apertura telaio	Spazio di riempimento (mm)	Dimensioni esterne (D=60 mm)		Peso	
	GB Frame	Frame openings	Packing space (mm)	External dimensions (D=60 mm)		Weight	
				HxW (mm)	HxW (in)	(kg)	(lb)
	SF 2x1 primed	1	60 x 120	241 x 261	9.488 x 10.276	6.0	13.184
	SF 2x2 primed	2	60 x 120	241 x 391	9.488 x 15.394	9.0	19.775
	SF 2x3 primed	3	60 x 120	241 x 522	9.488 x 20.551	12.0	26.345
	SF 2x4 primed	4	60 x 120	241 x 652	9.488 x 25.669	14.9	32.937
	SF 2x5 primed	5	60 x 120	241 x 783	9.488 x 30.827	17.9	39.528
	SF 2x6 primed	6	60 x 120	241 x 913	9.488 x 35.945	20.9	46.098
	SF 4x1 primed	1	120 x 120	300 x 261	11.811 x 10.276	7.1	15.675
	SF 4x2 primed	2	120 x 120	300 x 391	11.811 x 15.394	10.4	22.862
	SF 4x3 primed	3	120 x 120	300 x 522	11.811 x 20.551	13.6	30.049
	SF 4x4 primed	4	120 x 120	300 x 652	11.811 x 25.669	16.9	37.236
	SF 4x5 primed	5	120 x 120	300 x 783	11.811 x 30.827	20.2	44.423
	SF 4x6 primed	6	120 x 120	300 x 913	11.811 x 35.945	23.4	51.632
	SF 4+4x1 primed	2	120 x 120	469 x 261	18.465 x 10.276	10.9	24.118
	SF 4+4+4x1 primed	3	120 x 120	639 x 261	25.157 x 10.276	14.8	32.540
	SF 6x1 primed	1	180 x 120	358 x 261	14.095 x 10.276	8.2	18.144
	SF 6x2 primed	2	180 x 120	358 x 391	14.095 x 15.394	11.8	25.948

SF frames, primed, mild steel

SF-kehukset, pohjamaalattu teräs » Рама SF, окрашенная, стальная » SF-ramar, lackerat konstruktionsstål »
Telai SF, in acciaio con prima mano d'antiruggine

FI	Kehys	Aukkojen lukumäärä	Pakkaustila (mm)	Ulkomitat (D=60 mm)		Paino	
				HxW (mm)	HxW (in)	(kg)	(lb)
RU	Рама	Количество проёмов	Зона уплотнения (мм)	Внешние размеры (D=60 мм)		Вес	
				HxW (мм)	HxW (дюйм)	(кг)	(фунт)
SE	Ram	Ramöppningar	Packningsutrymme (mm)	Yttermått (D=60 mm)		Vikt	
				HxW (mm)	HxW (tum)	(kg)	(lb)
IT	Telai	Aperture telaio	Spazio di riempimento (mm)	Dimensioni esterne (D=60 mm)		Peso	
				HxW (mm)	HxW (tum)	(kg)	(lb)
GB	Frame	Frame openings	Packing space (mm)	External dimensions (D=60 mm)		Weight	
				HxW (mm)	HxW (in)	(kg)	(lb)
	SF 6x3 primed	3	180 x 120	358 x 522	14.095 x 20.551	15.3	33.752
	SF 6x4 primed	4	180 x 120	358 x 652	14.095 x 25.669	18.8	41.557
	SF 6x5 primed	5	180 x 120	358 x 783	14.095 x 30.827	22.4	49.339
	SF 6x6 primed	6	180 x 120	358 x 913	14.095 x 35.945	25.9	57.143
	SF 6+6x1 primed	2	180 x 120	586 x 261	23.071 x 10.276	13.1	28.968
	SF 6+6x2 primed	4	180 x 120	596 x 391	23.465 x 15.394	19.6	43.320
	SF 6+6x3 primed	6	180 x 120	596 x 522	23.465 x 20.551	25.4	56.107
	SF 6+6x4 primed	8	180 x 120	596 x 652	23.465 x 25.669	31.2	68.872
	SF 6+6x5 primed	10	180 x 120	596 x 783	23.465 x 30.827	37.0	81.636
	SF 6+6x6 primed	12	180 x 120	596 x 913	23.465 x 35.945	42.8	94.423
	SF 6+6x7 primed	14	180 x 120	596 x 1044	23.465 x 41.102	48.6	107.188
	SF 6+6x8 primed	16	180 x 120	596 x 1174	23.465 x 46.220	54.4	119.974
	SF 6+6x9 primed	18	180 x 120	596 x 1305	23.465 x 51.378	60.2	132.739
	SF 6+6x10 primed	20	180 x 120	596 x 1435	23.465 x 56.496	66.0	145.504
	SF 6+6+6x1 primed	3	180 x 120	814 x 261	32.047 x 10.276	18.1	39.991
	SF 8x1 primed	1	240 x 120	418 x 261	16.457 x 10.276	9.4	20.701
	SF 8x2 primed	2	240 x 120	418 x 391	16.457 x 15.394	13.2	29.123
	SF 8x3 primed	3	240 x 120	418 x 522	16.457 x 20.551	17.0	37.544
	SF 8x4 primed	4	240 x 120	418 x 652	16.457 x 25.669	20.8	45.966
	SF 8x5 primed	5	240 x 120	418 x 783	16.457 x 30.827	24.7	54.387
	SF 8x6 primed	6	240 x 120	418 x 913	16.457 x 35.945	28.5	62.809
	SF 8+8x1 primed	2	240 x 120	706 x 261	27.795 x 10.276	15.5	34.171
	SF 8+8x2 primed	4	240 x 120	716 x 391	28.189 x 15.394	22.6	49.758
	SF 8+8x3 primed	6	240 x 120	716 x 522	28.189 x 20.551	28.9	63.779
	SF 8+8x4 primed	8	240 x 120	716 x 652	28.189 x 25.669	35.3	77.800
	SF 8+8x5 primed	10	240 x 120	716 x 783	28.189 x 30.827	41.6	91.822
	SF 8+8x6 primed	12	240 x 120	716 x 913	28.189 x 35.945	48.0	105.843
	SF 8+8x7 primed	14	240 x 120	716 x 1044	28.189 x 41.102	54.4	119.864

SF frames, primed, mild steel

SF-kehykset, pohjamaalattu teräs ▶ Рама SF, окрашенная, стальная ▶ SF-ramar, lackerat konstruktionsstål ▶ Telaio SF, in acciaio con prima mano d'antiruggine

FI	Kehys	Aukkojen lukumäärä	Pakkaustila (mm)	Ulkomitat (D=60 mm)		Paino	
				HxW (mm)	HxW (in)	(kg)	(lb)
RU	Рама	Количество проёмов	Зона уплотнения (мм)	Внешние размеры (D=60 мм)		Вес	
				HxW (мм)	HxW (дюйм)	(кг)	(фунт)
SE	Ram	Ramöppningar	Packningsutrymme (mm)	Yttermått (D=60 mm)		Vikt	
				HxW (mm)	HxW (tum)	(kg)	(lb)
IT	Telaio	Aperture telaio	Spazio di riempimento (mm)	Dimensioni esterne (D=60 mm)		Peso	
				HxW (mm)	HxW (tum)	(kg)	(lb)
GB	Frame	Frame openings	Packing space (mm)	External dimensions (D=60 mm)		Weight	
				HxW (mm)	HxW (in)	(kg)	(lb)
	SF 8+8x8 primed	16	240 x 120	716 x 1174	28.189 x 46.220	60.7	133.885
	SF 8+8x9 primed	18	240 x 120	716 x 1305	28.189 x 51.378	67.1	147.907
	SF 8+8x10 primed	20	240 x 120	716 x 1435	28.189 x 56.496	73.4	161.928
	SF 8+8+8x1 primed	3	240 x 120	944 x 261	37.165 x 10.276	21.6	47.619

SF frames, acid proof stainless steel

SF-kehykset, haponkestävä ruostumaton teräs ▶ Рама SF, кислотоустойчивая, нержавеющая сталь ▶ SF-ramar, syrafast rostfritt stål ▶ Telaio SF, in acciaio inox resistente agli acidi



Parts needed for a complete solution



Optional



For installation instructions, please see chapter Frame Installation Manual.

RATINGS	Fire: A-Class, H-Class, UL1479	Water pressure: 4 bar	Gas pressure: 2.5 bar
----------------	---------------------------------------	------------------------------	------------------------------

FI	Kehys	Aukkojen lukumäärä	Pakkaustila (mm)	Ulkomitat (D=60 mm)		Paino	
				HxW (mm)	HxW (in)	(kg)	(lb)
RU	Рама	Количество проёмов	Зона уплотнения (мм)	Внешние размеры (D=60 мм)		Вес	
				HxW (мм)	HxW (дюйм)	(кг)	(фунт)
SE	Ram	Ramöppningar	Packningsutrymme (mm)	Yttermått (D=60 mm)		Vikt	
				HxW (mm)	HxW (tum)	(kg)	(lb)
IT	Telaio	Aperture telaio	Spazio di riempimento (mm)	Dimensioni esterne (D=60 mm)		Peso	
				HxW (mm)	HxW (tum)	(kg)	(lb)
GB	Frame	Frame openings	Packing space (mm)	External dimensions (D=60 mm)		Weight	
				HxW (mm)	HxW (in)	(kg)	(lb)
	SF 2x1 AISI 316	1	60 x 120	241 x 261	9.488 x 10.276	6.0	13.184
	SF 4x1 AISI 316	1	120 x 120	300 x 261	11.811 x 10.276	7.1	15.675

SF frames, acid proof stainless steel

SF-kehukset, haponkestävä ruostumaton teräs » Рама SF, кислотоустойчивая, нержавеющая сталь »
SF-ramar, syrafast rostfritt stål » Telaio SF, in acciaio inox resistente agli acidi

FI	Kehys	Aukkojen lukumäärä	Pakkaustila (mm)	Ulkomitat (D=60 mm)		Paino	
				HxW (mm)	HxW (in)	(kg)	(lb)
RU	Рама	Количество проёмов	Зона уплотнения (мм)	Внешние размеры (D=60 мм)		Вес	
				HxW (мм)	HxW (дюйм)	(кг)	(фунт)
SE	Ram	Ramöppningar	Packningsutrymme (mm)	Yttermått (D=60 mm)		Vikt	
				HxW (mm)	HxW (tum)	(kg)	(lb)
IT	Telaio	Aperture telaio	Spazio di riempimento (mm)	Dimensioni esterne (D=60 mm)		Peso	
				HxW (mm)	HxW (tum)	(kg)	(lb)
GB	Frame	Frame openings	Packing space (mm)	External dimensions (D=60 mm)		Weight	
				HxW (mm)	HxW (in)	(kg)	(lb)
	SF 4x2 AISI 316	2	120 x 120	300 x 391	11.811 x 15.394	10.4	22.862
	SF 4x3 AISI 316	3	120 x 120	300 x 522	11.811 x 20.551	13.6	30.049
	SF 4x4 AISI 316	4	120 x 120	300 x 652	11.811 x 25.669	16.9	37.236
	SF 6x1 AISI 316	1	180 x 120	358 x 261	14.095 x 10.276	8.2	18.144
	SF 6x2 AISI 316	2	180 x 120	358 x 391	14.095 x 15.394	11.8	25.948
	SF 6x3 AISI 316	3	180 x 120	358 x 522	14.095 x 20.551	15.3	33.752
	SF 6x4 AISI 316	4	180 x 120	358 x 652	14.095 x 25.669	18.8	41.557
	SF 8x1 AISI 316	1	240 x 120	418 x 261	16.457 x 10.276	9.4	20.701
	SF 8x2 AISI 316	2	240 x 120	418 x 391	16.457 x 15.394	13.2	29.123
	SF 8x3 AISI 316	3	240 x 120	418 x 522	16.457 x 20.551	17.0	37.544
	SF 8x4 AISI 316	4	240 x 120	418 x 652	16.457 x 25.669	20.8	45.966

SF frames, aluminium

SF-kehukset, alumiini » Рама SF, алюминий » SF-ramar, aluminium » Telai SF, in alluminio




For installation instructions, please see chapter Frame Installation Manual.

RATINGS	Fire: A-Class, H-Class, UL1479	Water pressure: 4 bar	Gas pressure: 2.5 bar
----------------	---------------------------------------	------------------------------	------------------------------

	FI Kehys	Aukkojen lukumäärä	Pakkaustila (mm)	Ulkomitat (D=60 mm)		Paino	
				HxW (mm)	HxW (in)	(kg)	(lb)
	RU Рама	Количество проёмов	Зона уплотнения (мм)	Внешние размеры (D=60 мм)		Вес	
	SE Ram	Ramöppningar	Packningsutrymme (mm)	Yttermått (D=60 mm)		Vikt	
	IT Telaio	Aperture telaio	Spazio di riempimento (mm)	Dimensioni esterne (D=60 mm)		Peso	
	GB Frame	Frame openings	Packing space (mm)	External dimensions (D=60 mm)		Weight	
				HxW (mm)	HxW (in)	(kg)	(lb)
	SF 2x1 ALU	1	60 x 120	241 x 261	9.488 x 10.276	2.1	4.541
	SF 4x1 ALU	1	120 x 120	300 x 261	11.811 x 10.276	2.4	5.379
	SF 4x2 ALU	2	120 x 120	300 x 391	11.811 x 15.394	3.6	7.870
	SF 4x3 ALU	3	120 x 120	300 x 522	11.811 x 20.551	4.7	10.340
	SF 4x4 ALU	4	120 x 120	300 x 652	11.811 x 25.669	5.8	12.809
	SF 6x1 ALU	1	180 x 120	358 x 261	14.095 x 10.276	3.3	7.187
	SF 6x2 ALU	2	180 x 120	358 x 391	14.095 x 15.394	4.6	10.229
	SF 6x3 ALU	3	180 x 120	358 x 522	14.095 x 20.551	6.0	13.250
	SF 6x4 ALU	4	180 x 120	358 x 652	14.095 x 25.669	7.4	16.292
	SF 8x1 ALU	1	240 x 120	418 x 261	16.457 x 10.276	3.7	8.157
	SF 8x2 ALU	2	240 x 120	418 x 391	16.457 x 15.394	5.2	11.398
	SF 8x3 ALU	3	240 x 120	418 x 522	16.457 x 20.551	6.6	14.661
	SF 8x4 ALU	4	240 x 120	418 x 652	16.457 x 25.669	8.1	17.901

SF frames, technical information

SF-kehysten tekniset tiedot » Рама SF, техническая информация » SF-ramar, teknisk information »
Telaio SF, informazioni tecniche

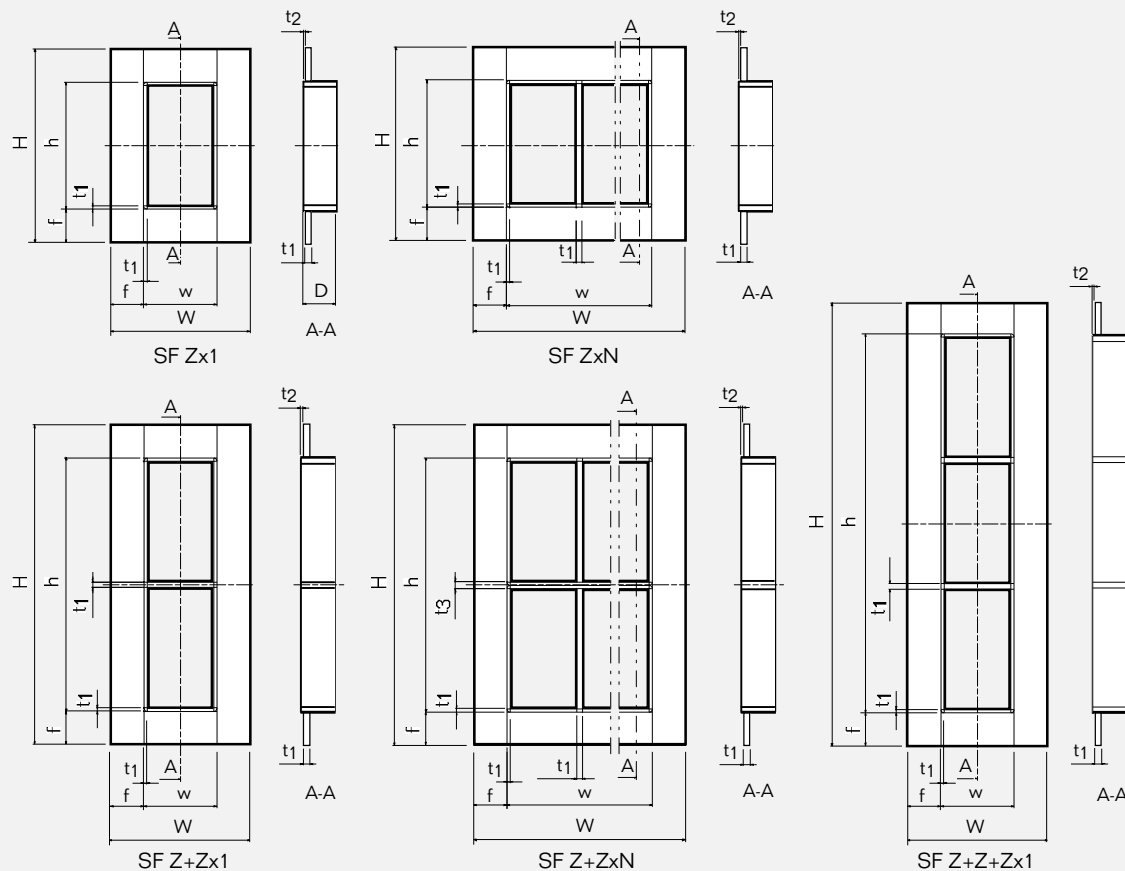

Pos	(mm)	(in)
h	H - 120	H - 4.724
w	W - 120	W - 4.724
D	60	2.362
f	60	2.362
t1	10	0.394
t2	3	0.118
t3	20	0.787

Z = Frame size
N = Number of horizontal openings

Z= Kehyksen koko
N = Aukkojen lukumäärä vaakasuunnassa

Z - Размер рамы
N - Количество проемов/секций по горизонтали

Z = Ramstorlek
N = Antal öppningar i bredd

Z = Grandezza telaio
N = Numero delle aperture orizzontali

Note: All dimensions are nominal values
Huomaa: Kaikki mitat ovat nimellisarvoja
Внимание: Все размеры номинальные
Obs: Alla mått är nominella
Nota: tutte le dimensioni sono valori nominali